
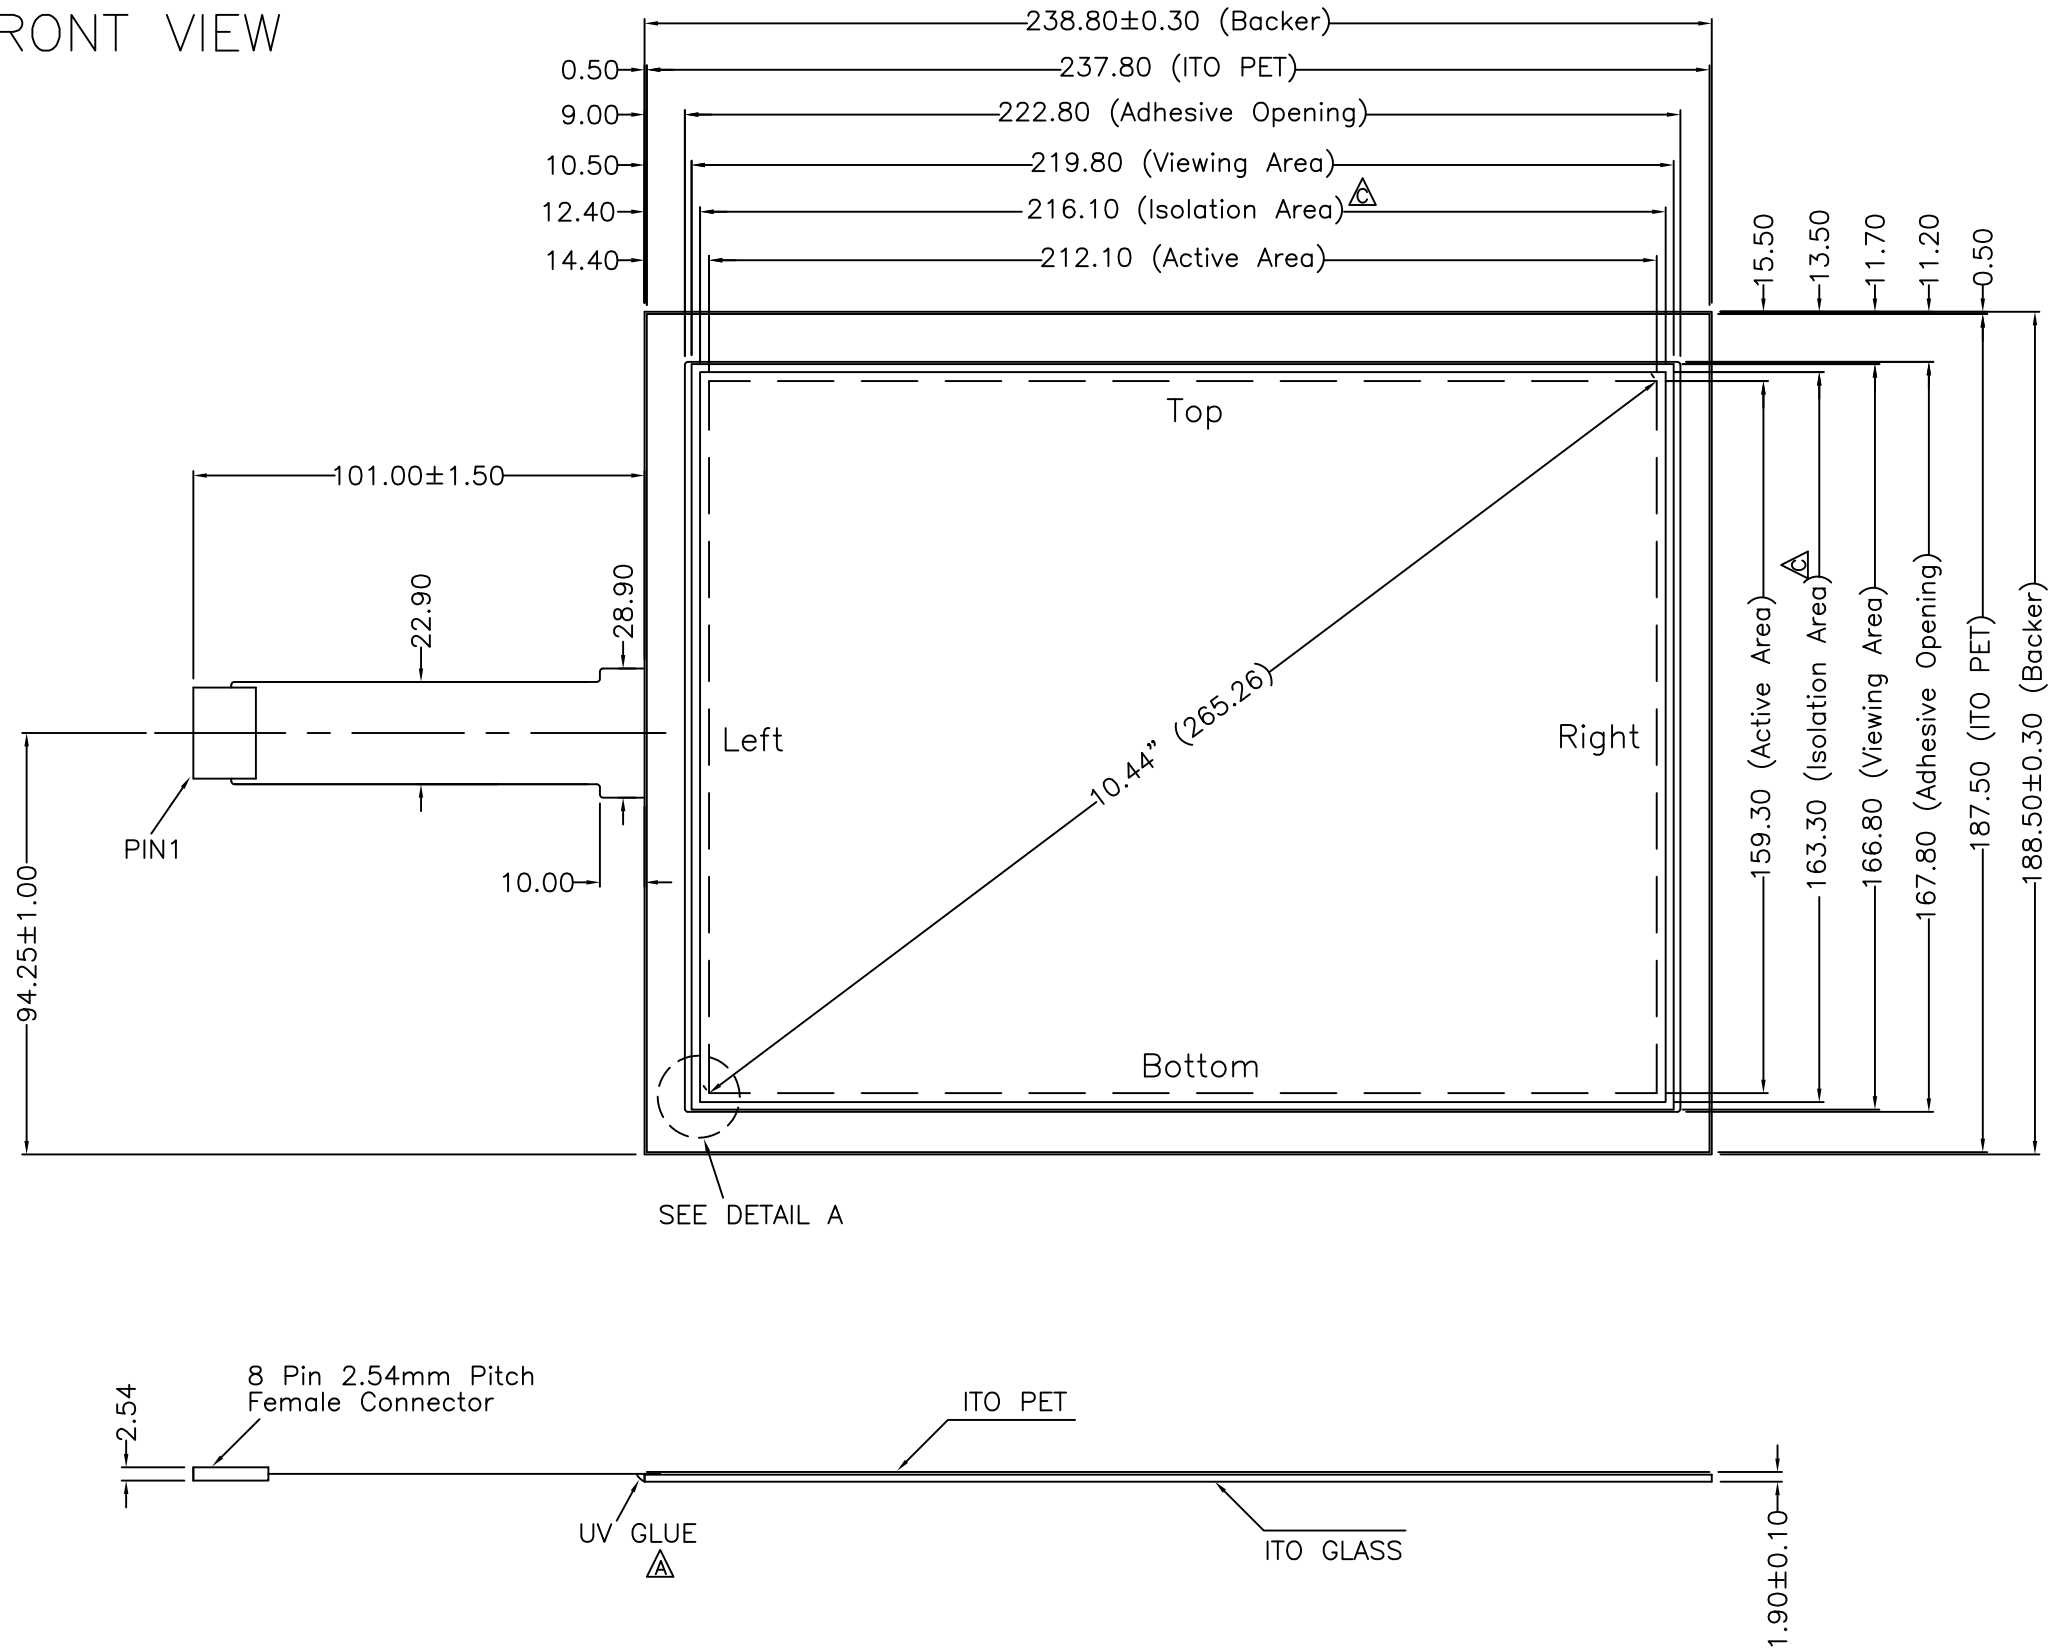


FRONT VIEW

Pin#	Assignment
1	Bottom
2	Bottom sense
3	Top sense
4	Top
5	Left
6	Left sense
7	Right sense
8	Right

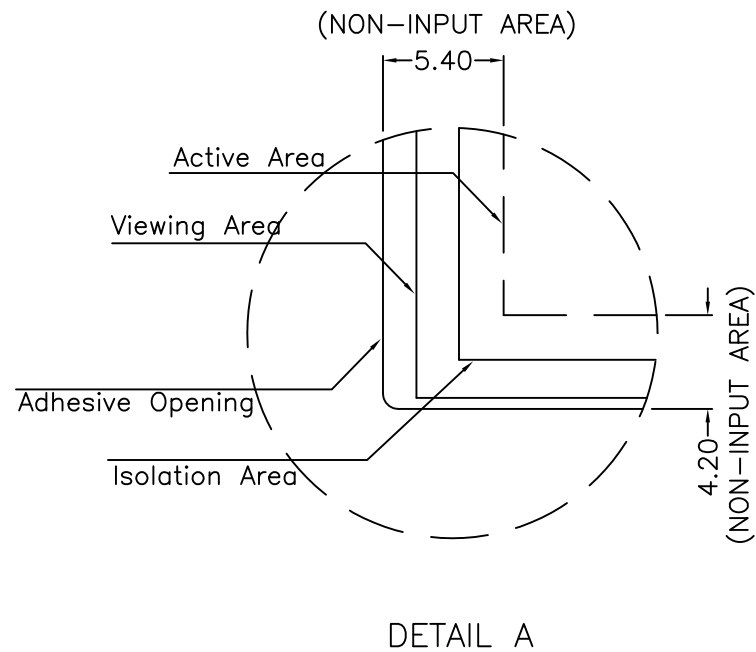

NOTES:

1. ITO GLASS THICKNESS : 1.60mm
 2. OVERALL THICKNESS : 1.90±0.10mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 - △ 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 7. OTHER SPEC : SEE APPROVAL SHEET
- *BEFORE DESIGN PLEASE REFER TO THE INTEGRATION GUIDE



NO.	DATE	DESCRIPTION	CHK
C	AUG 28 , 2006	INCREASE ISOLATION AREA	ALEX
B	JUNE 27 , 2005	MODIFY CIRCUIT & TAIL TYPE	ALEX
A	SEP 29 , 2004	ADD UV GLUE TO TAIL LOCATION	ALEX

REVISION			
CHIEF OF DESIGN		APPROVED	Grace
ENGINEER		PROJECT MANAGER	
DRAWN BY	Bruce	DATE	May. 08, 2012
SHT	1	OF	1
REV.			C

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED	MODEL NAME : 9518
.X ± 0.50	DWG NO : 9518-3-012
.XX ± 0.50	
.XXX ± 0.30	
ANGULAR .	SCALE: 1:1 UNIT: mm