

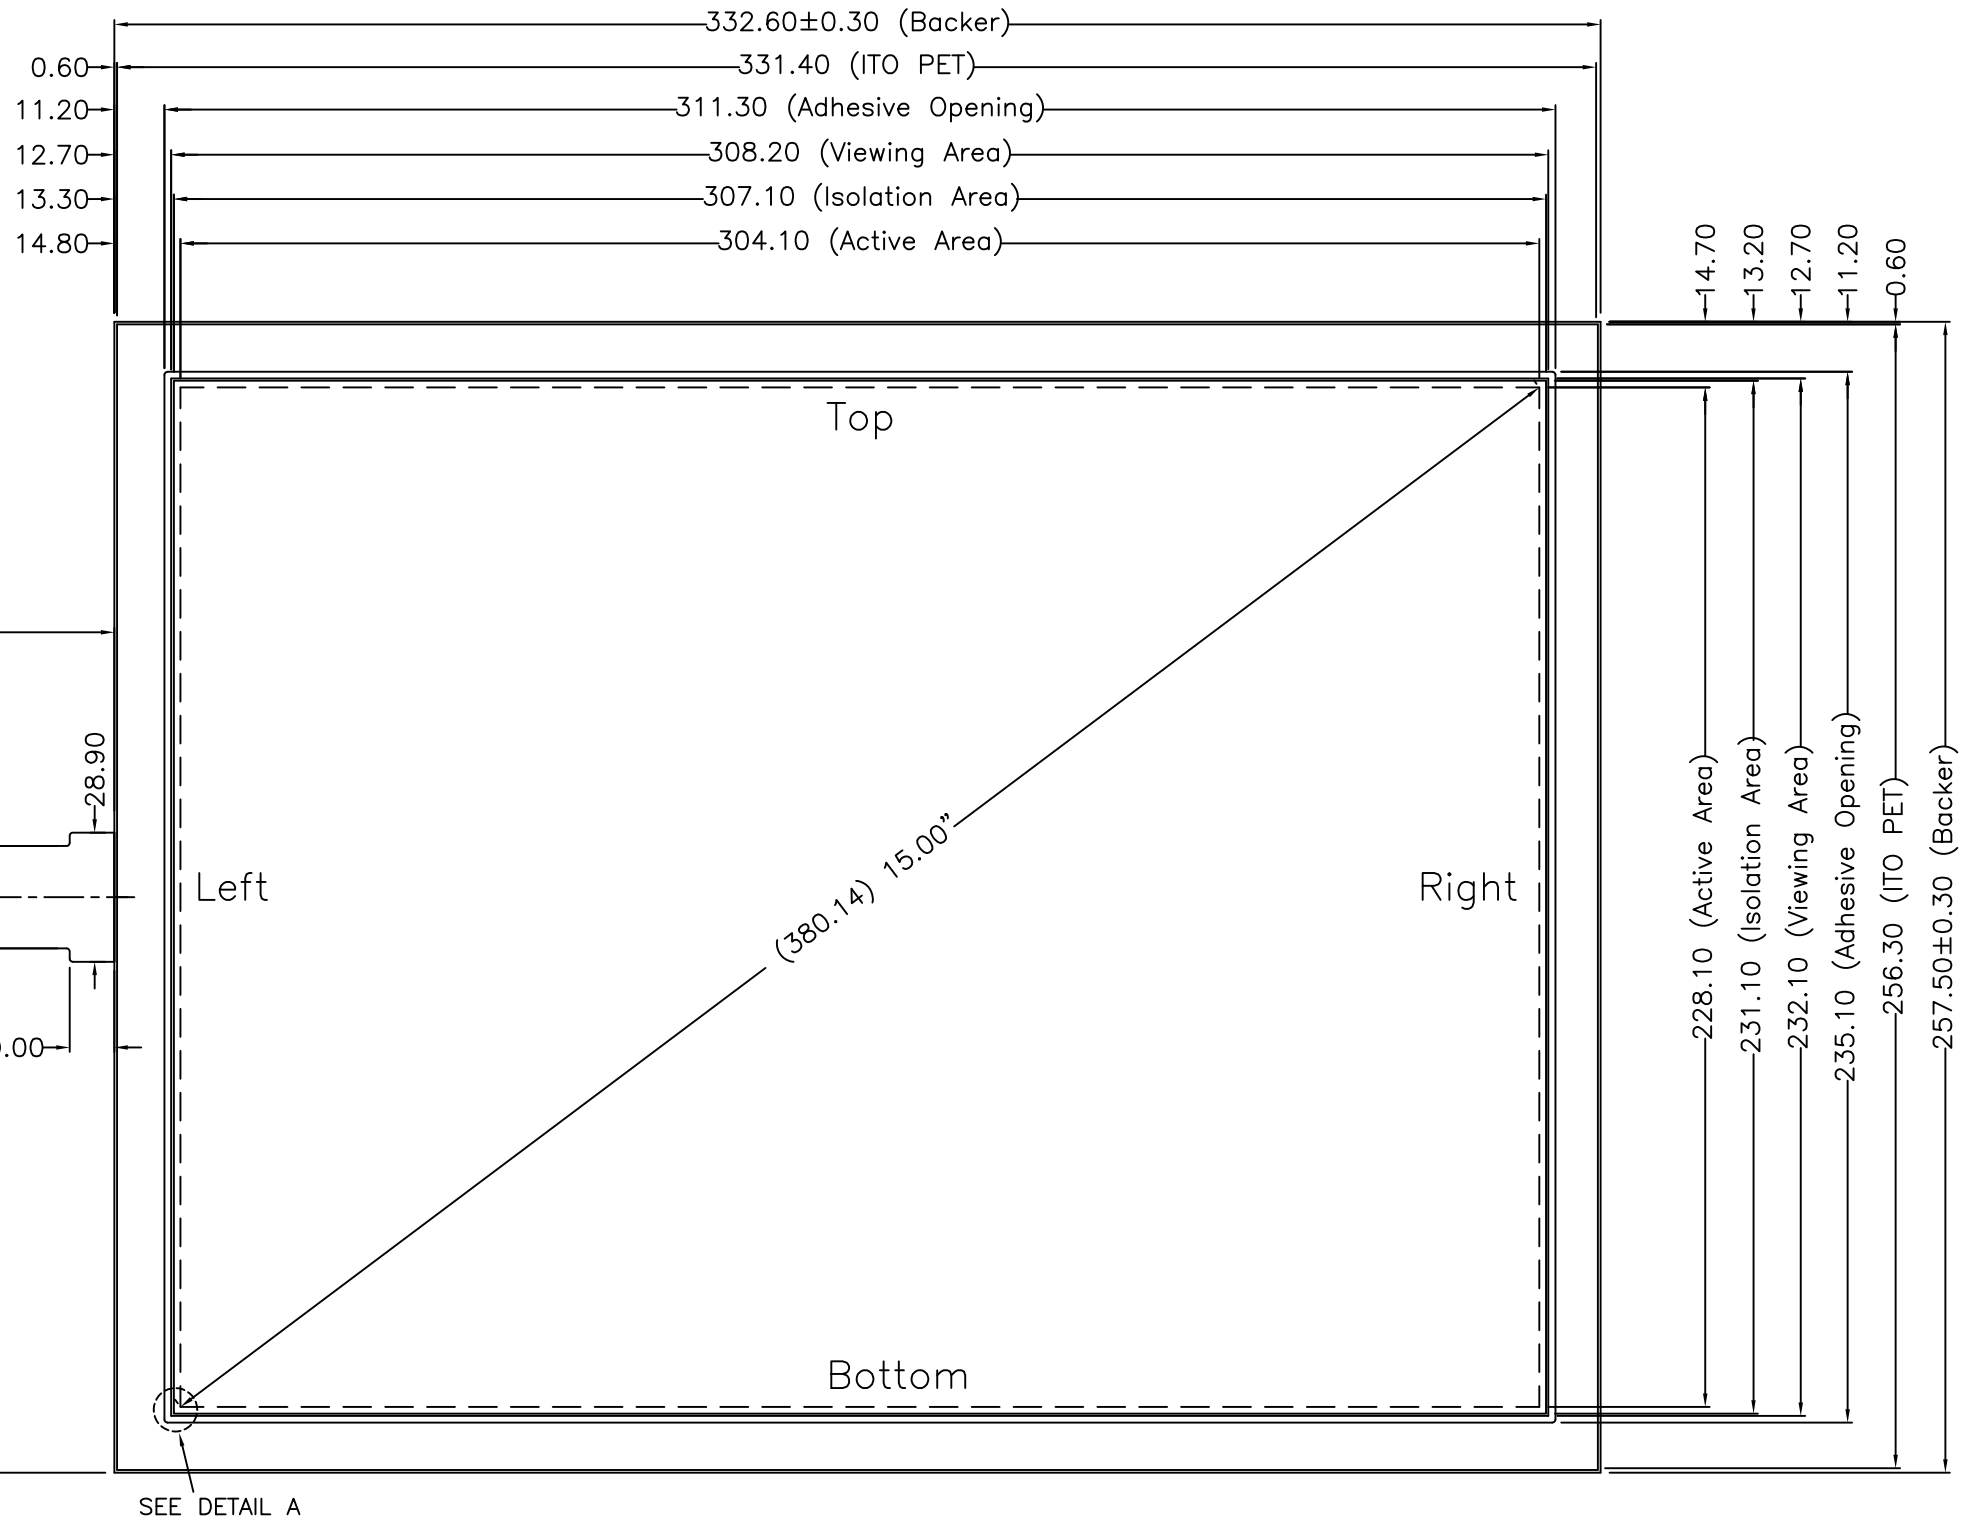


TOUCH SIDE VIEW

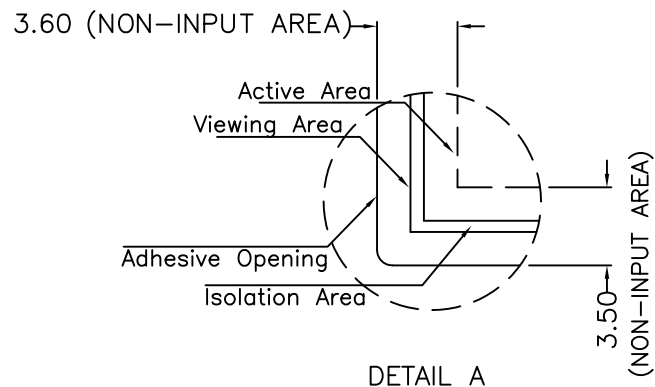

| Pin# | Assignment |
|------|--------------|
| 1 | Right |
| 2 | Right sense |
| 3 | Left sense |
| 4 | Left |
| 5 | Bottom |
| 6 | Bottom sense |
| 7 | Top sense |
| 8 | Top |

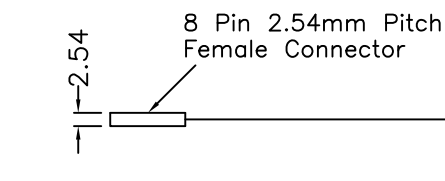

- NOTES:
- ITO GLASS THICKNESS : 1.80mm
 - OVERALL THICKNESS : 2.10±0.20mm
 - CONNECTOR AND PINOUT AS INDICATED
 - FRONT SURFACE : ANTI-GLARE HARDCOAT
 - LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 - TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C TIN PLATED CONTACTS
 - OTHER SPEC : SEE APPROVAL SHEET
- *BEFORE DESIGN PLEASE REFER TO THE INTEGRATION GUIDE



| A | SEP 7, 2005 | MODIFY CIRCUIT & TAIL TYPE | ALEX |
|-----------------|-------------|----------------------------|--------------|
| NO. | DATE | DESCRIPTION | CHK |
| REVISION | | | |
| CHIEF OF DESIGN | | APPROVED | Grace |
| ENGINEER | | PROJECT MANAGER | |
| DRAWN BY | Bruce | DATE | May 11, 2012 |
| SHT 1 OF 1 | | REV. | A |

Apex Material Technology Corp.

| | | |
|-----------------------------|--------|---|
| TOLERANCES UNLESS SPECIFIED | | PROJECT NAME : 9535 DWG NO : 9535-1-012 SCALE: 1:1 UNIT: mm |
| .X | ± 0.50 | |
| .XX | ± 0.50 | |
| .XXX | ± 0.30 | |
| ANGULAR | . | |