



TOUCH SIDE VIEW


Pin #	Assignment
1	Top
2	Left
3	Bottom
4	Right

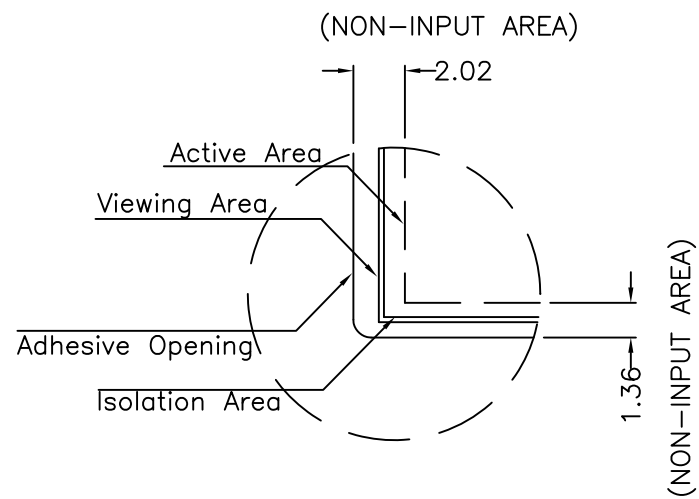

DETAIL A

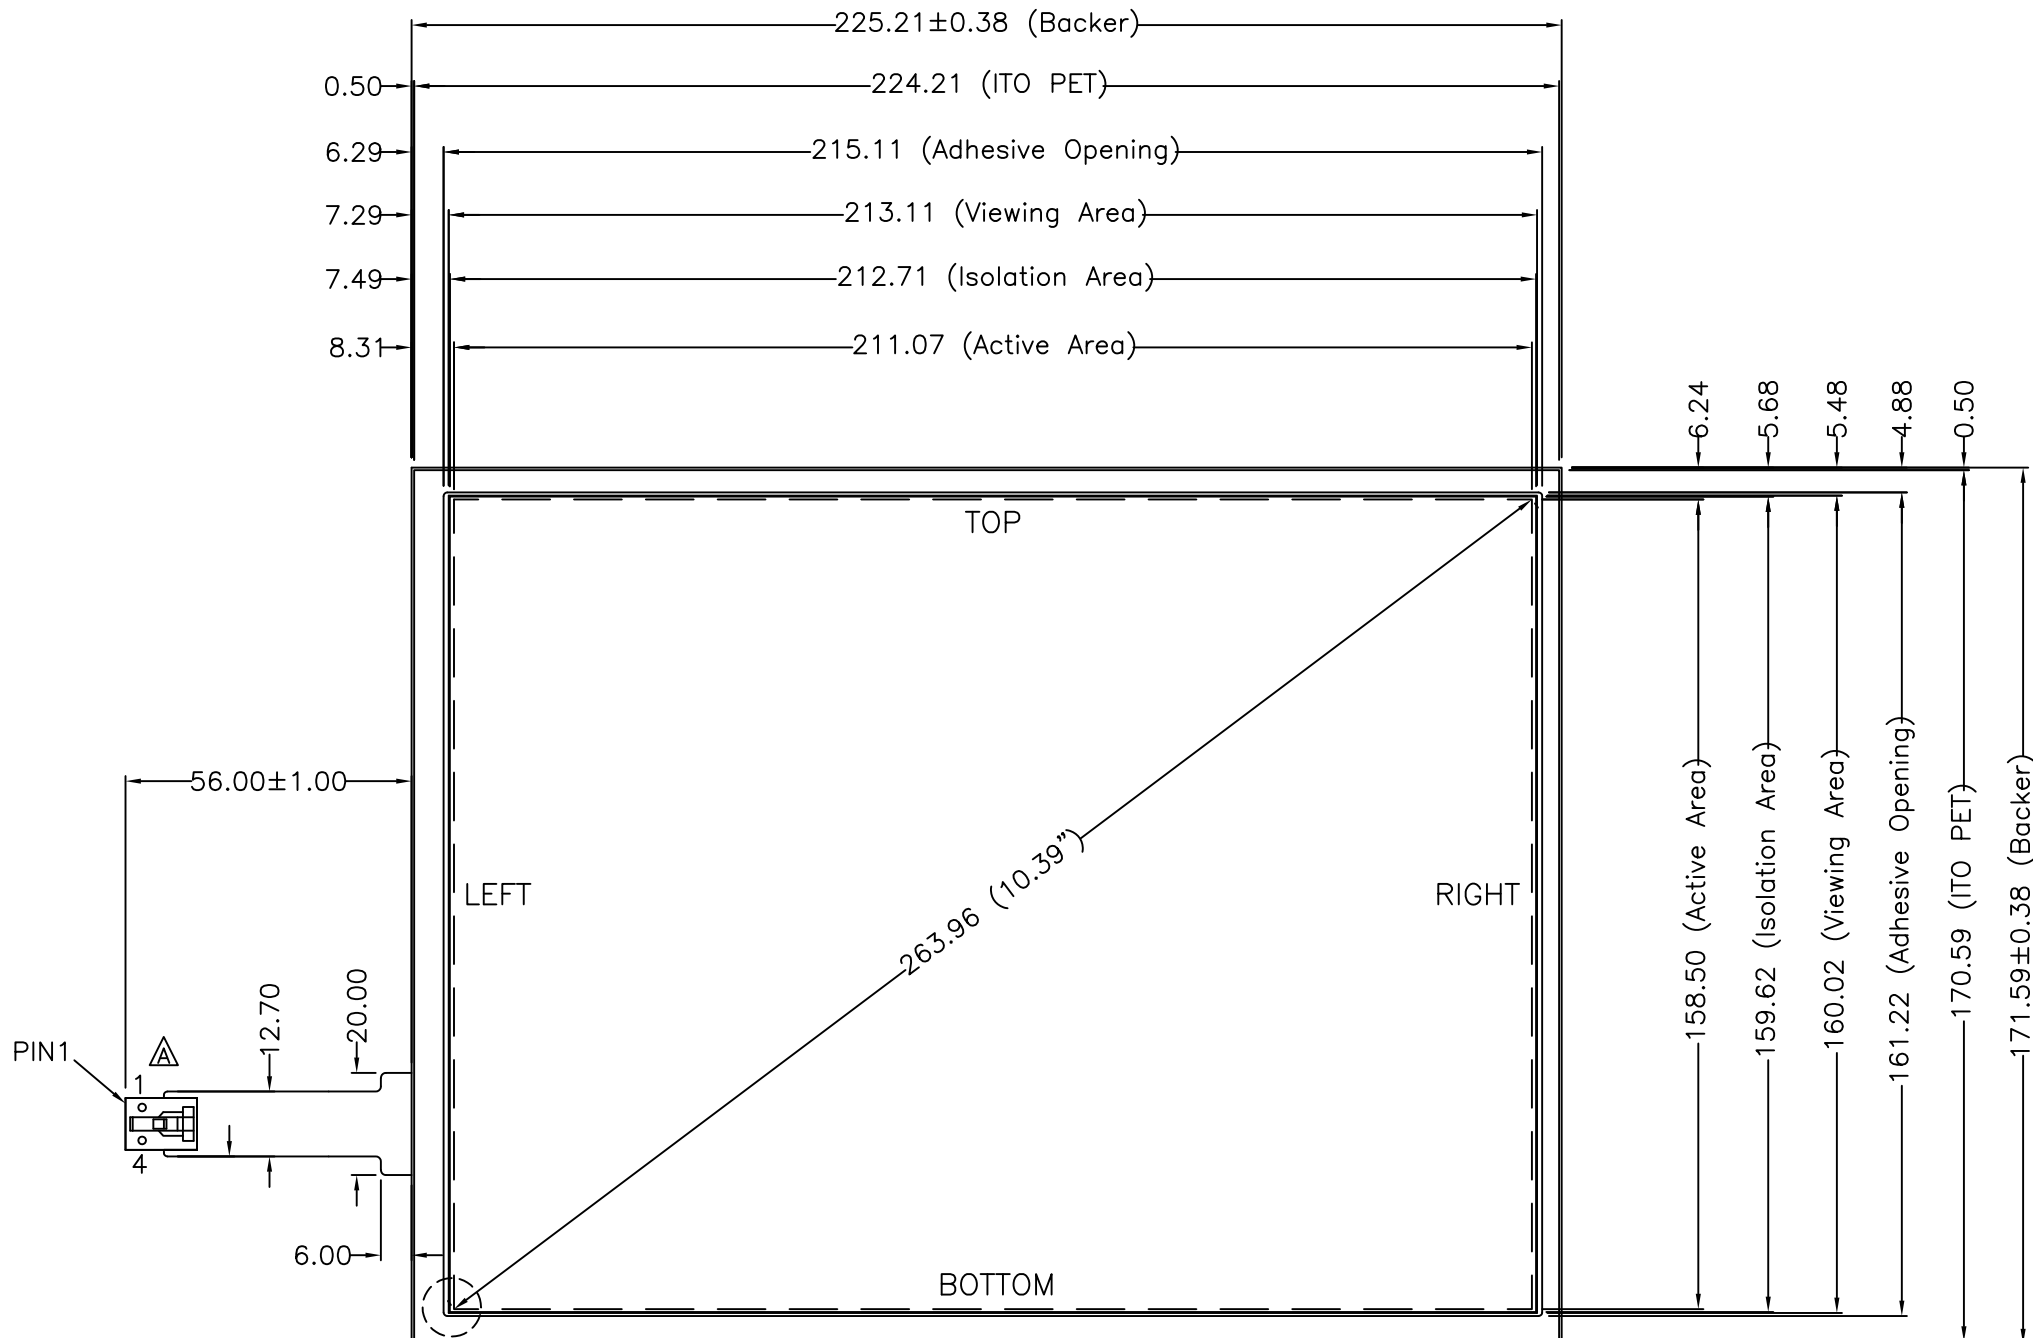

SEE DETAIL A

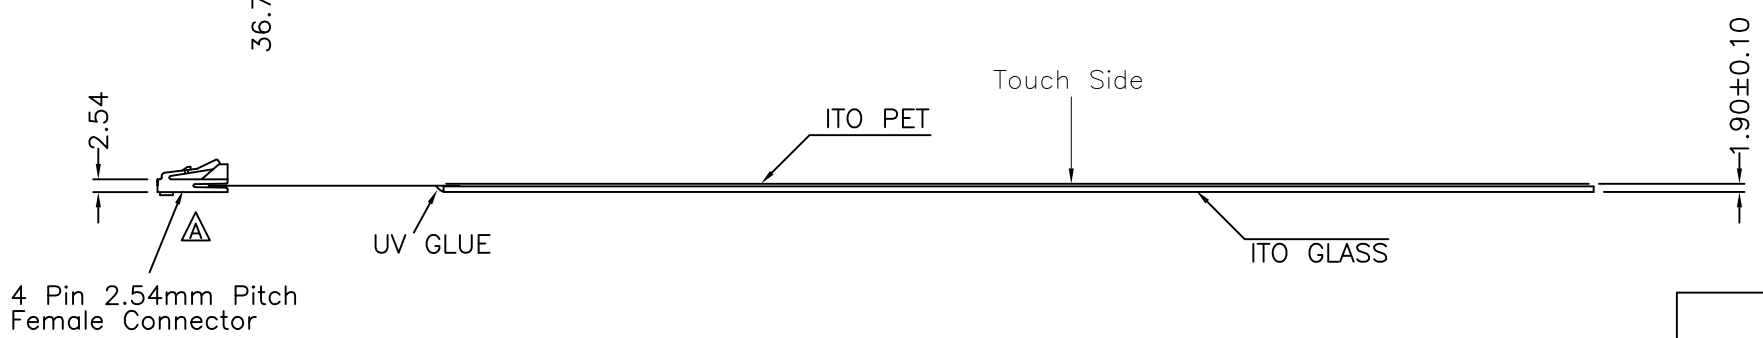

4 Pin 2.54mm Pitch Female Connector

- NOTES:
1. ITO GLASS THICKNESS : 1.60mm
 2. OVERALL THICKNESS : 1.90±0.10mm
 3. CONNECTOR AND PINOUT AS INDICATED
 4. FRONT SURFACE : ANTI-GLARE HARDCOAT
 5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
 - △ 6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C (WITH LATCH) CONNECTOR
 7. OTHER SPEC : SEE APPROVAL SHEET
- *BEFORE DESIGN PLEASE REFER TO THE INTEGRATION GUIDE



NO.	DATE	DESCRIPTION	CHK
A	Mar 08 , 2007	AMP-C Connector with latch Modify.	ALEX
REVISION			
CHIEF OF DESIGN		APPROVED	Grace
ENGINEER		PROJECT MANAGER	
DRAWN BY	Bruce	DATE	May 11 , 2012
		REV.	A
SHT 1 OF 1			

Apex Material Technology Corp.	
TOLERANCES UNLESS SPECIFIED	
.X	± 0.50
.XX	± 0.50
.XXX	± 0.30
ANGULAR	.
MODEL NAME :	9541
DWG NO :	9541-1-012
SCALE: 1:1 UNIT: mm	