



TOUCH SIDE VIEW

Pin #	Assignment
1	Bottom
2	Right
3	Top
4	Left

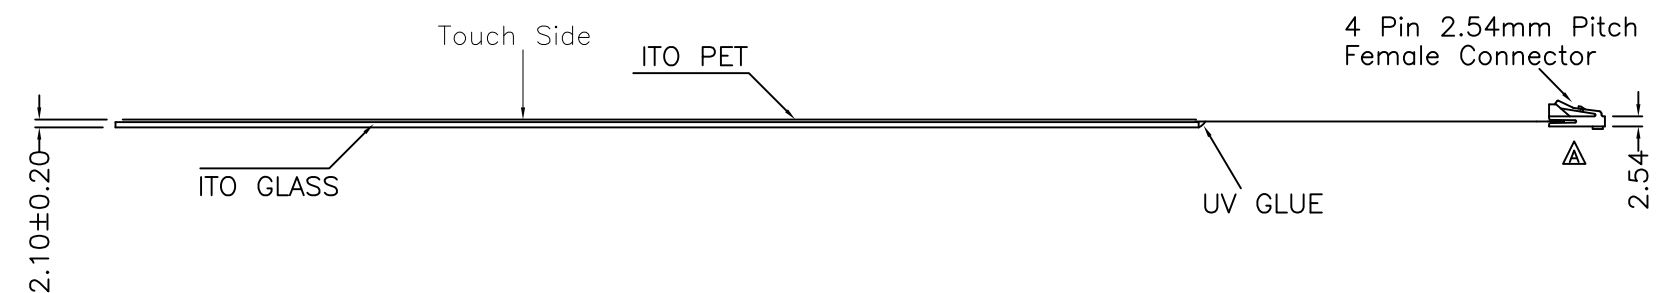

- NOTES:
1. ITO GLASS THICKNESS : 1.80mm
  2. OVERALL THICKNESS : 2.10±0.20mm
  3. CONNECTOR AND PINOUT AS INDICATED
  4. FRONT SURFACE : ANTI-GLARE HARDCOAT
  5. LAYER TO LAYER ASSEMBLY TOLERANCE: ±0.50mm
  6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C ( WITH LATCH ) CONNECTOR
  7. OTHER SPEC : SEE APPROVAL SHEET
- \*BEFORE DESIGN PLEASE REFER TO THE INTEGRATION GUIDE

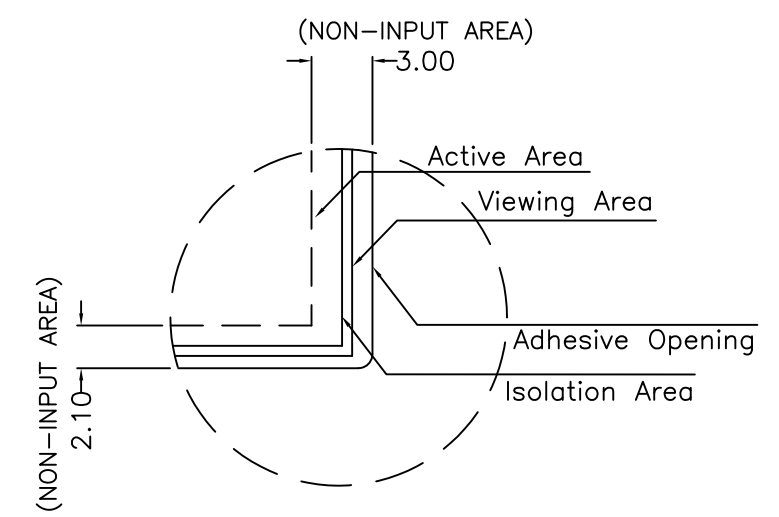

NO.	DATE	DESCRIPTION	CHK
A	Mar 8, 2007	AMP-C Connector with latch Modify.	ALEX
REVISION			
CHIEF OF DESIGN		APPROVED	Grace
ENGINEER		PROJECT MANAGER	
DRAWN BY	Bruce	DATE	May 14, 2012
SHT	1	OF	1
REV.			A

Apex Material Technology Corp.

TOLERANCES UNLESS SPECIFIED		MODEL NAME : 9542 DWG NO : 9542-1-012 SCALE: 1:1 UNIT: mm
.X	± 0.50	
.XX	± 0.50	
.XXX	± 0.30	
ANGULAR	.	