



FRONT VIEW

Pin#	Assignment
1	LL
2	UL
3	S
4	LR
5	UR

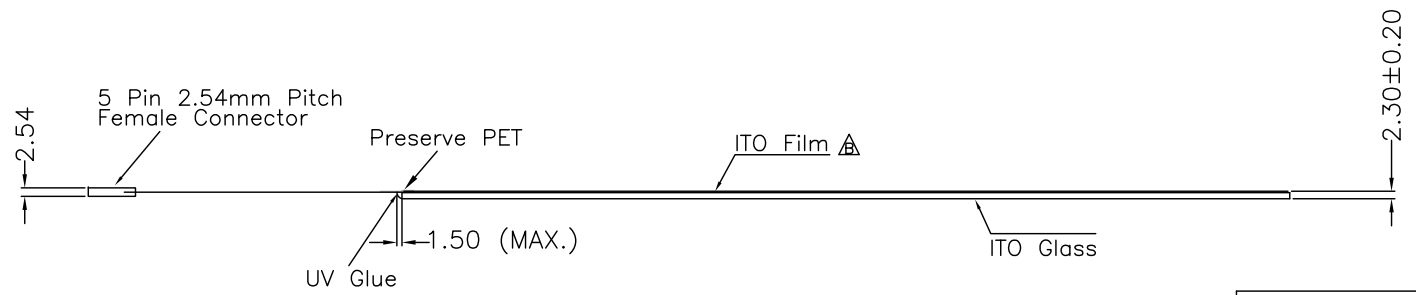

- NOTES:
1. ITO GLASS THICKNESS : 1.80mm
  2. OVERALL THICKNESS : 2.30±0.20mm
  3. CONNECTOR AND PINOUT AS INDICATED
  4. FRONT SURFACE : ANTI-GLARE HARDCOAT
  5. LAYER TO LAYER ASSEMBLY TOLERANCE : ±0.50mm
  6. TAIL TYPE : IMMERSION GOLD PLATED FPC WITH AMP-C CONNECTOR
  7. OTHER SPEC : SEE APPROVAL SHEET

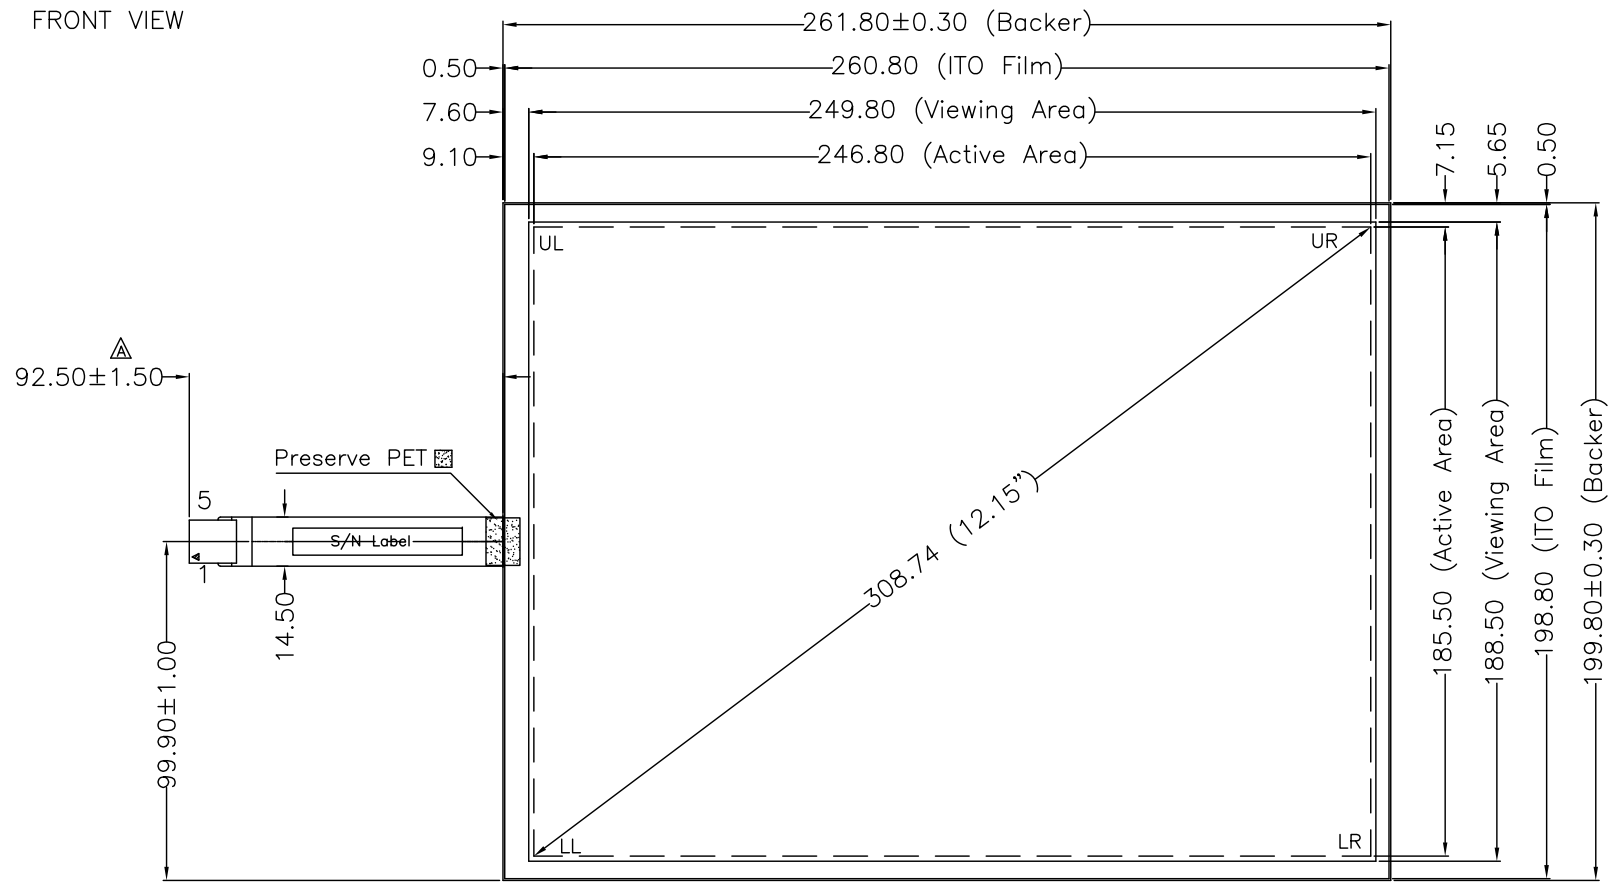

NO.	DATE	DESCRIPTION	CHK
B	OCT.23.2009	MODIFY ITO Film	Alex
A	JUL.7.2009	MODIFY TAIL	Alex

REVISION			
CHIEF OF DESIGN		APPROVED	Alex
ENGINEER		PROJECT MANAGER	
DRAWN BY	Willi	DATE	OCT 23 , 2009
SHT	1 OF 1	REV.	B

Apex Material Technology Corp.	
TOLERANCES UNLESS SPECIFIED	
.X	± 0.50
.XX	± 0.50
.XXX	± 0.30
ANGULAR	.
MODEL NAME :	28161
DWG NO :	28161-2-01
SCALE:	1:1 UNIT: mm