
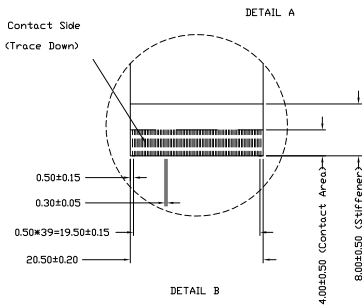


JL5	
PIN#	Assignment
1	GND
2	Guard Ring
3-52	X1-X50
53-58	NC
59	Guard Ring
60	GND


JL4	
PIN#	Assignment
1	GND
2	Guard Ring
3-10	NC
11-38	Y1-Y28
39	Guard Ring
40	GND

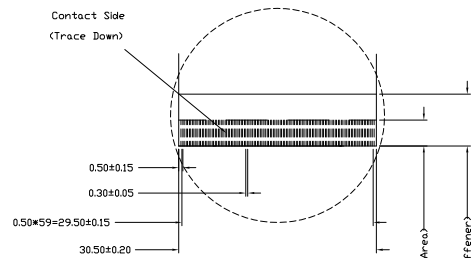

CROSS-SECTION

NOTES:

1. INPUT MODE : ANTI-UV PROJECTED CAPACITIVE
2. OVERALL THICKNESS : 0.40±0.2mm (WITHOUT DCA'S LINER)
3. CONTROL BOARD : PM141X SERIES, PM1540 & AE1415
TAIL TYPE : GOLD PLATED FPC , ZIF
4. OTHER SPEC. : SEE APPROVAL SHEET
5. PLEASE REFER TO AMT TOUCH PANEL INTEGRATION GUIDES FOR SYSTEM MECHANICAL DESIGN AND ASSEMBLY METHODS

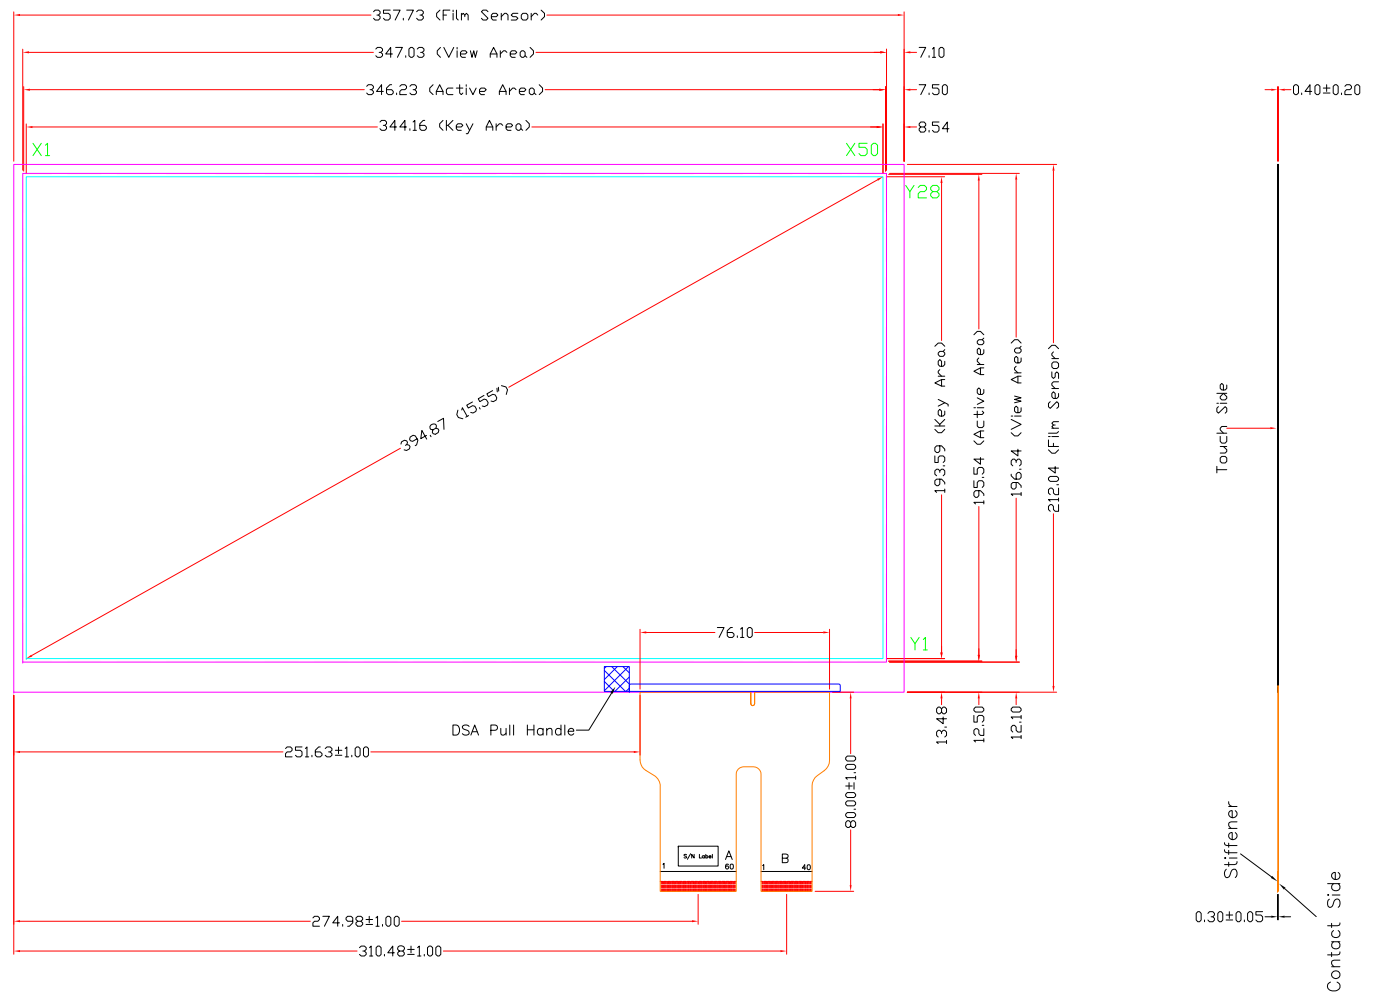

AMT Apex Material Technology Corp.						RoHS COMPLIANT	
NO.		DESCRIPTION	CHK	TOLERANCES UNLESS SPECIFIED		DWG NO:	
REVISION				.X	± 0.50	AD-92-K3101-A10-U01-01	
CHIEF OF DESIGN		APPROVED	Only	.XX	± 0.50		
DRAWN BY	Jackson	DATE	2022.05.08	.XXX	± 0.30		
SHEET 1 OF 1				SCALE	1:1		