

# PM6300B CONTROL BOARD

## DATASHEET

Version:1.2  
Issue date:2024/11/8

### Revision Table

Date	Revision	Changes
2024/11/8	V1.0	New Release
2024/9/10	V1.1	Modify the <b>Mechanical Size</b> section according to <b>ECN-20240410-01</b> , changing the connector pin length.
2024/11/8	V1.2	Modify the driver software to remove support for Windows 2000.

## PenMount 6300B Control Board Data Sheet

### RoHS Compliance

PenMount 6300B USB control board is a touch screen control board designed for USB interface and specific for 4, 8-wire or 5-wire touch screens. It is designed with USB interface features with multiple devices supporting function. PenMount 6300B control board using PenMount 6010 controller that has been designed for those who may like all-in-one solution with 12bit A/D converter built-in to make the total printed circuit board denser. There are two connectors on this board, one connector is for 4, 8-wire or 5-wire touch screen cable, and the other is for 4-pin USB A type cable.


### Specifications:

Touch Screen	For 4, 8-wire or 5-wire analog resistive type
Communications	USB Full-speed, 12Mbps
Touch Screen Controller	PenMount 6010 controller IC
Resolution	4096X4906 (Maximum)
Size	60x26 mm, two 3φ screw holes
Cursor accuracy	< 1% (Active Area Diagonal of touch screen with PenMount Advanced calibration utility support)
Resistance Range	50~1.3K ohm
Diagnostic	LED on board
Operating Voltage	+5V DC
Electro Static Discharge (ESD)	Air Discharge 15KV , Contact Discharge 8KV
Storage Temperature	-40 °C ~ 85 °C
Operating Temperature	-20°C ~ 85 °C
Power Consumption	Standby Mode : 9 mA ; Active Mode : 52mA (VCC=+5V, Touch Panel Resistance: 95 ohm) Note. Actual current will be different by touch panel's resistance.


### Driver Software:

Windows XP/ XPE/ 2003/ 2008/ Vista/ 7 /8 /10 /11  
WinCE 4.2/ 5.0/ 6.0/7.0  
Linux OS (Kernel 2.6 and X-Window mode)  
QNX 6.4.1/ 6.5 (Inbox support)


**Mechanical Size** : PM6300B5 and PM6300B8 are the same mechanical size.

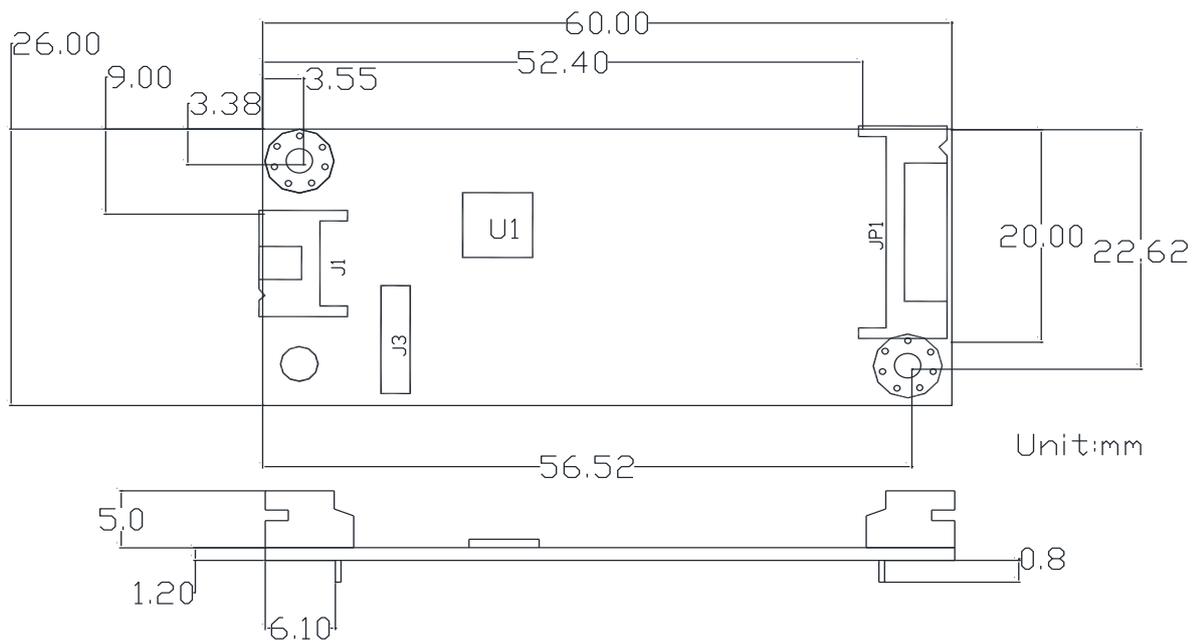

PM6300B5 supports 5 wires touch panel, R12 is not mounted in the circuit.

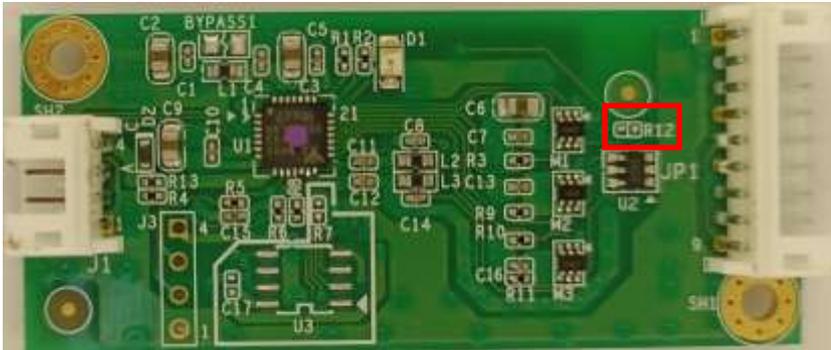

PM6300B8 supports 4/8 wires touch panel, R12 is mounted in the circuit.

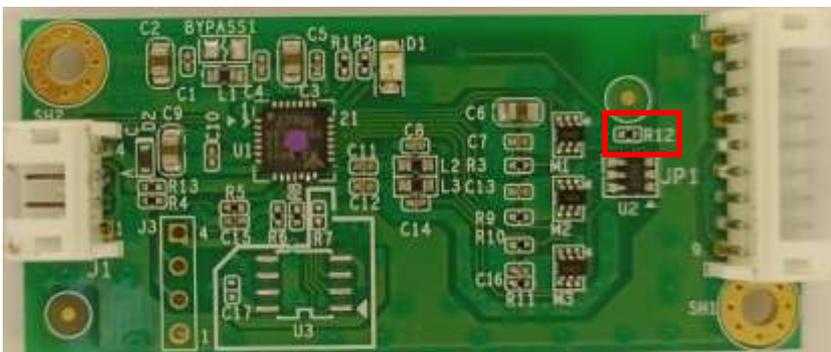

**Connector Definition**

J1 USB Connector :

PIN 1	GND
PIN 2	D+
PIN 3	D-
PIN 4	VCC

JP1 Touch Screen Lines :

	PM6300B8		PM6300B5
	8-Wire	4-Wire	5-Wire
PIN1	Ground	Ground	Ground
PIN2	Top Excite	Top	UL (Y)
PIN3	Bottom Excite	Bottom	UR (H)
PIN4	Left Excite	Left	LL (L)
PIN5	Right Excite	Right	LR (X)
PIN6	Top Sense	---	Sense (S)
PIN7	Bottom Sense	---	---
PIN8	Left Sense	---	---
PIN9	Right Sense	---	---

The available PM6300B control board :

- PM6300B8 : 4 、 8 - wire , USB Interface ◦
- PM6300B5 : 5 - wire , USB Interface ◦